9.5 DISPLAY SECTION

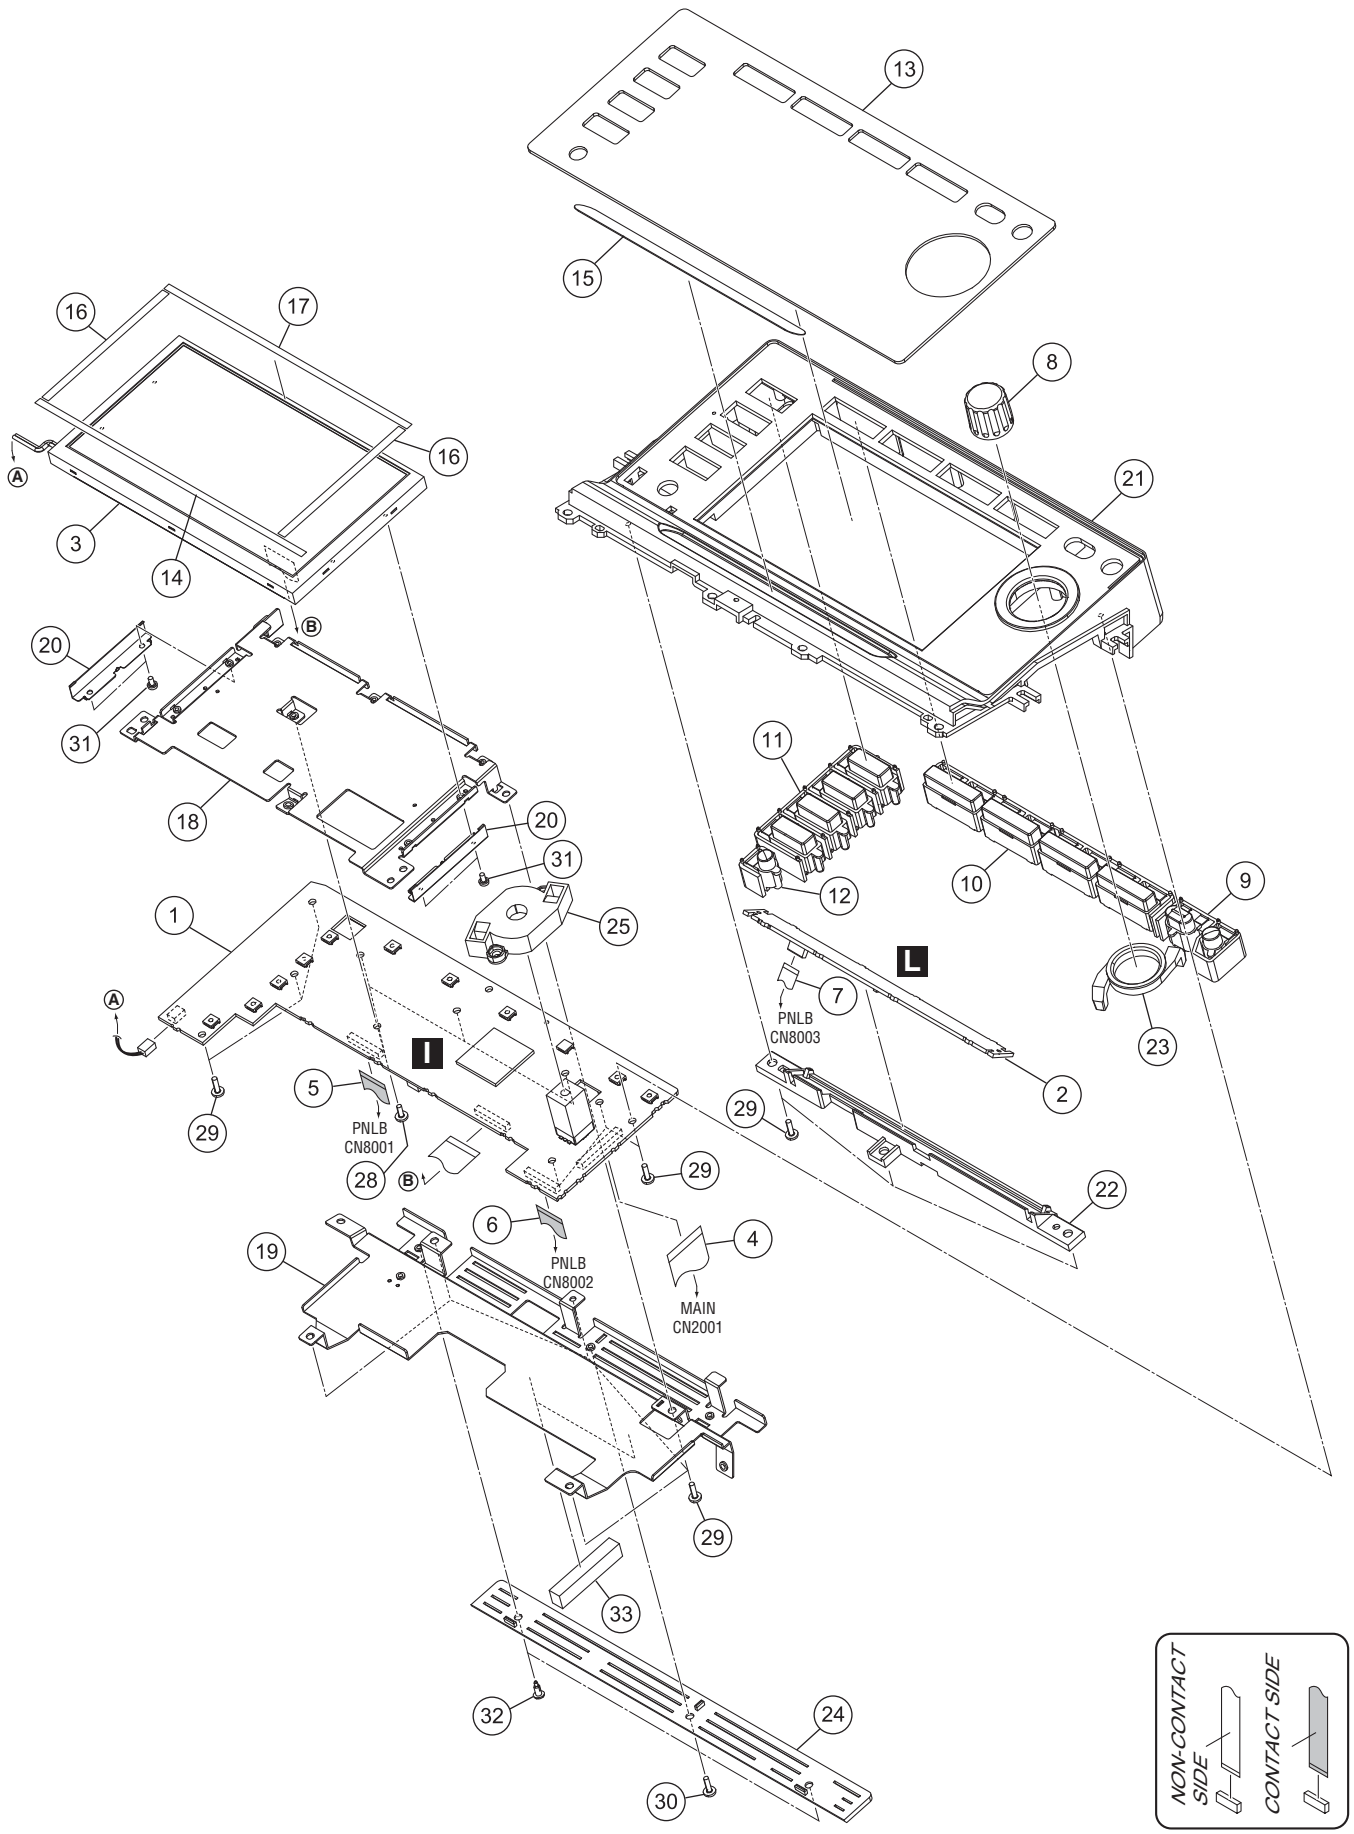

DISPLAY SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	TFTB Assy	DWX2882
	2	CDCB Assy	DWX2987
	3	LCD	DWX3126
	4	29P FFC	DDD1481
	5	18P FFC	DDD1482
	6	16P FFC	DDD1483
	7	7P FFC	DDD1485
	8	Dial Knob	DAA1246
	9	Button (MENU)	DAC2480
	10	Button (MODE SELECT)	DAC2481
	11	Button (DEVICE SELECT)	DAC2482
	12	Button (TIME)	DAC2483
	13	Display Window	DAH2680
	14	LCD Packing (Bottom)	DEC3184
	15	CDC Sheet	DEC3187
	16	LCD Packing (Side)	DEC3192
	17	LCD Packing (Top)	DEC3193
	18	LCD Stay	DND1263
	19	Rear Bracket	DND1264
	20	LCD Holder	DNH2850
	21	LCD Panel	DNK5319
	22	CDC Stay	DNK5320
	23	Ring Lens (BROWSE)	DNK5322
	24	LCD Bottom Plate	DNK5323
	25	Reflector	DNK5405
	26	•••••	
	27	•••••	
	28	Screw	BBZ26P060FTB
	29	Screw	BPZ26P080FTC
	30	Screw	BBZ30P060FTB
	31	Screw	BSZ20P040FTB
	32	Rivet (Plastic)	RBM-003
	33	FFC Cushion	DEC3248

2. CONTRAST OF MISCELLANEOUS PARTS

NOTES:
- *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Screws adjacent to ▼ mark on product are used for disassembly.*
- *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions, apply as you think it appropriate.)*
- *Nos. indicate the pages and Nos. in the service manual for the base model.*
- *When ordering resistors, first convert resistance values into code form as shown in the following examples.*

Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47k ohm (tolerance is shown by J=5%, and K=10%).

560Ω → 56 x 10^1 → 561 ····· RD1/4PU561J
47kΩ → 47 x 10^3 → 473 ····· RD1/4PU473J
0.5Ω → R50 ····· RN2HR50K
1Ω → 1R0 ····· RS1P1R0K

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62kΩ → 562 x 10^1 → 5621 ····· RN1/4PC5621F

2.1 CONTRAST TABLE

(1) CDJ-2000 and CDJ-2000/2 are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-2000 /CUXJ,/SYXJ8,/FLXJ,/KXJ,/AXJ5	CDJ-2000 /UXJCB2,/SYXJ82,/FLXJ2,/KXJ2,/AXJ52	Remarks
		PCB ASSEMBLIES			
NSP		1..TFTA Assy	DWM2355	DWM2445	
	P77-2	2..SDCB Assy	DWX2980	DWX3293	*2
	P83-1	2..TFTB Assy	DWX2882	DWX3291	*1
	P83-2	2..CDCB Assy	DWX2987	DWX3292	*1
		DISPLAY SECTION			
	P83-3	LCD	DWX3126	CWX3970	
	P83-17	LCD Packing (Top)	DEC3193	DEC3376	
	P83-18	LCD Stay	DND1263	DND1267	
	P83-19	Rear Bracket	DND1264	DND1268	
	P83-20	LCD Holder	DNH2850	Not used	
	P83-21	LCD Panel	DNK5319	DNK5951	
	P83-30	Screw	BBZ30P060FTB(x 22)	BBZ30P060FTB(x 21)	
	P83-31	Screw	BSZ20P040FTB	Not used	
		Screw	Not used	BSZ30P040FTC	No. 1
		40P FFC	Not used	DDD1541	No. 2
		Fitting/LCD	Not used	DNH2992	No. 3

(2) CDJ-2000/CUXJ and CDJ-2000/UXJCB2 are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-2000/CUXJ	CDJ-2000/UXJCB2	Remarks
		PACKING SECTION			
⚠	P75-1	Power Cable	ADG7021	ADG7022	
	P75-23	Packing Case	DHG2800	DHG3025	

(3) CDJ-2000/SYXJ8 and CDJ-2000/SYXJ82 are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-2000/SYXJ8	CDJ-2000/SYXJ82	Remarks
		PACKING SECTION			
	P75-23	Packing Case	DHG2799	DHG3026	

(4) CDJ-2000/FLXJ and CDJ-2000/FLXJ2 are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-2000/FLXJ	CDJ-2000/FLXJ2	Remarks
		PACKING SECTION			
	P75-23	Packing Case	DHG2801	DHG3028	

(5) CDJ-2000/KXJ5 and CDJ-2000/KXJ52 are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-2000/KXJ	CDJ-2000/KXJ2	Remarks
		PACKING SECTION			
	P75-23	Packing Case	DHG2804	DHG3029	

(6) CDJ-2000/AXJ5 and CDJ-2000/AXJ52 are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-2000/AXJ5	CDJ-2000/AXJ52	Remarks
		PACKING SECTION			
	P75-23	Packing Case	DHG2803	DHG3030	

*1 Refer to “3.PCB PARTS LIST”, “5.SCHEMATIC DIAGRAM” and “6.PCB CONNECTION DIAGRAM”.

*2 Although DWX2980 and DWX3293 are different in part number, they are constructed same. Refer to “CDJ-2000/CUXJ(RRV3999)”.

Changing the constants for the parts of the MAIN and JACB Assys

With a modification of the LCD section, the constants for the parts of the MAIN and JACB Assy, have been changed for improvement of the sound quality.

Mark	No.	Description	Part No.		
MAIN Assy : DWG1660					
RESISTORS					
R	570	RS1/16SS332J	=>	RS1/16SS222J	
R	571	RS1/16SS332J	=>	RS1/16SS222J	
R	572	RS1/16SS332J	=>	RS1/16SS222J	
R	573	RS1/16SS332J	=>	RS1/16SS222J	
CAPACITORS					
C	3093	CEHVAW101M16	=>	CCH1565	
JACB Assy : DWX2988					
CAPACITORS					
C	9401	CEHAZL220M50	=>	CEHAZL101M25	
C	9404	CEHAZL220M50	=>	CEHAZL101M25	